




U.S. Hwy. 69 South
Tyler, Texas 75703

903-839-9800

BATTERY MAINTENANCE

- 1) Only use distilled water in battery cells - Distilled water only has Hydrogen and Oxygen in it...no salts, chemicals, or other dissolved solids. Tap water, purified water, well water, and rain water will damage and/or shorten the life of your batteries. We recommend checking your battery water once per month.
- 2) Fill cells to 1/2-inch over lead plates, but not to top of cell. Make sure the plates stay covered with water at all times, but do not fill into the vent tube as this will cause leakage while charging.
- 3) Keep batteries fully charged while in storage. it is best to plug your charger up every two weeks, even if the cart has not been used. **NOTE:** Chargers turn themselves off automatically when the charge cycle is complete but they do not turn themselves back on. You must manually unplug the charger from the cart, wait ten seconds, and then plug back into the cart to reset charger.
- 4) Keep batteries clean - Rinse dirt and debris from battery tops with hose when dirty. Also remove any corrosion that may have formed around the battery cables. Applying an anti-corrosion treatment is highly recommended. The Cart Shed sells a product called Whip® which is amazing and only cost \$10/ bottle.

VERY IMPORTANT: Make sure battery cable nuts stay tightened. Loose cables can destroy a battery quickly due to arching which will melt your terminals...this damage is not covered under manufactures warranty. Battery nuts should be torqued to 95-105 in-lbs.

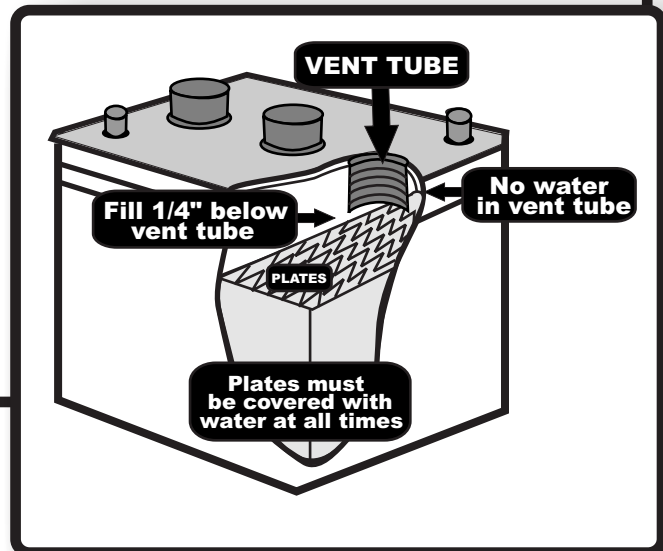

If you have further questions, please call The Cart Shed
903-839-9800 or 800-839-9008